



## TS TRAFFIC STANDARD LED MODULE R / Y / G | TINTED LENS

Ø 200 / Ø 300 MM | 230 / 42 VAC | 8 W | >400 CD




**LED OPTICAL UNIT** 

## **Features:**

- Linear driver based on current regulator
- Construction based on certified norm: EN 12368
- PWM Dimmable LED technology
- Low power consumption
- Perfect visibility
- Very good tightness
- High vibrations and impacts resistance
- Temperature fluctuation resistance
- Lightweight construction
- Very easy installation
- Additional masks for different symbol





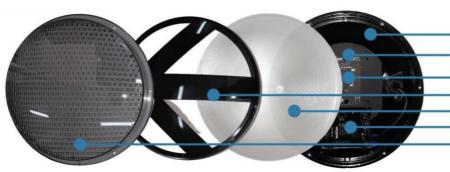

Housing & LED Central Source
Aluminum Cooler
LED MCPCB
Mask
Fresnel Lens
LED Driver
Front Lens

Contact us at office@dastrafficsystem.com for more.